



**APLAST**  
ROTO MOULDING  
PIPING / TOOLING

# AQUAstay tanks

for rainwater, drinking water and waste water

Economic and prudent management of valuable water has become not only an ecological but a vital necessity. With AQUAstay tanks you can see to the future of your environment today. In your apartment or house the water collected from tanks can replace the drinking water used for flushing toilets, washing cars and laundry and watering gardens.

**Protect your water sources today -  
for a better tomorrow for your environment!  
Choose AQUAstay tanks.**




**for rainwater**




**for drinking water**  
(Certificate W 270)




**for waste water**

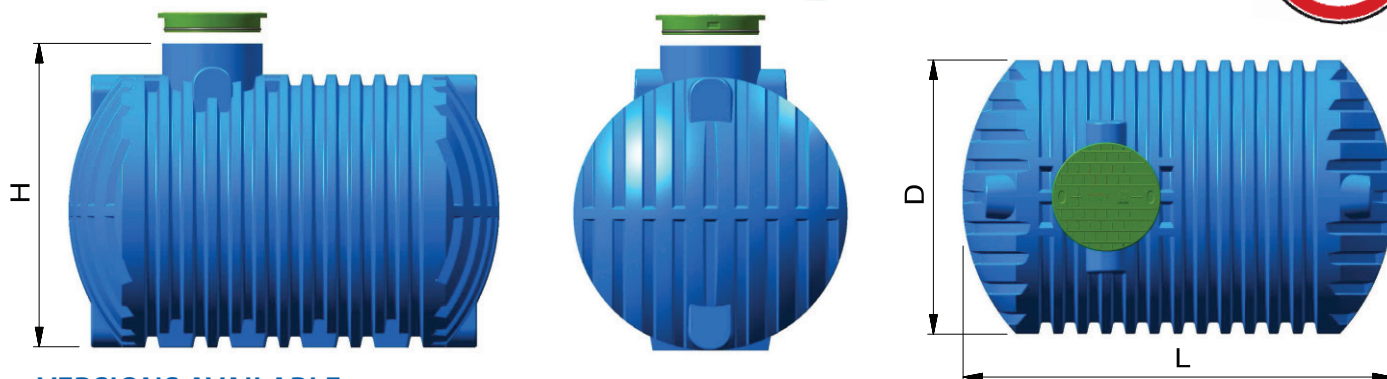

## VERSIONS AVAILABLE



Extension of an inspection chamber with rings or telescopic extensions



Security lock

## AQUAstay tanks are distinguished by the following features:

- **HIGH QUALITY** - made from biodegradable polyethylene, which in suitable for drinking water and foodstuff materials have been tested for the growth of microorganisms (W270) at an accredited laboratory.
- **MULTIPURPOSE** - for rainwater, drinking water and waste water.
- **ECONOMICAL** - reduction in drinking water consumption - the investment is recovered within two to three years.
- **ROBUST CONSTRUCTION** - due to being manufactured with rotomoulding the tanks up to 12,000 l are available in a monolithic design (cast in one piece).
- **QUICK INSTALLATION AND EASY FOR USE** - low weight enables quick and easy transport and installation. The products are distinguished by practical use and quick and easy cleaning.
- **50 - YEAR WARRANTY** - on the stability of water tank (installed by the manufacturer's instructions).
- **ALWAYS IN STOCK** - organised transport and immediate delivery.
- **UPGRADE OPTION** - with the standard Aplast programme (custom - made rings and connections, sand traps, grease separators, etc.).
- **RESISTANCE TO FIRE** - class E standard SIST EN 13501.
- **LOAD** - the water tank may be installed into surfaces, where the static axial load of vehicles does not exceed 2.2 tonnes with a gravel bed depth of 0.8 metres. In such a case, the cast iron cover of suitable capacity has to be used.

## AQUAstay water tanks

Volume	Height (H)	Diameter (D)	Length (L)	Weight	
2.000 l - L	1,6 m	ø 1,4 m	1,45 m	104 kg	
2.500 l - L			1,75 m	120 kg	
3.000 l - L			2,35 m	132 kg	
3.500 l - XL	2,0 m	ø 1,7 m	1,80 m	158 kg	
5.000 l - XL			2,45 m	216 kg	
6.000 l - XL			2,90 m	258 kg	
7.000 l - XL			3,35 m	298 kg	
10.000 l - XL			4,40 m	384 kg	
8.000 l - XXL	2,6 m	ø 2,3 m	2,60 m	262 kg	
10.000 l - XXL			3,10 m	308 kg	
12.000 l - XXL			3,65 m	352 kg	
16.000 l - XXL			4,80 m	516 kg	
18.000 l - XXL			5,30 m	556 kg	
20.000 l - XXL			5,80 m	596 kg	
30.000 l - XXL			8,50 m	856 kg	
40.000 l - XXL			11,20 m	1.116 kg	
50.000 l - XXL			13,40 m	1.376 kg	



APLAST proizvodnja in trgovina d.o.o.  
Petrovče 115a, 3301 Petrovče, Slovenija  
www.aplast.si | info@aplast.si



YOUR RETAILER: